


**H&K Heavy Duty Spring Operated Cable Reeling Drums for  
4c x 10mm<sup>2</sup>, 4c x 16mm<sup>2</sup> PUR Drum Reeling cables**



Type	Drawing No.	Ø d	Ø D	a	b	3+PE c <sup>11</sup>	Ø e	Ø f	Ø g	Ø h	Ø i	k
LT 155	01-61-00-000	155	260	101,5	110	80	35	155	65	85	4 x Ø 9	10
LT 180	01-53-00-000	180	290	113	130	110	35	180	65	85	4 x Ø 9	10
LT 220	01-38-00-000	220	400	114	120	80	35	220	100	130	4 x Ø 13	9
LT 221	01-52-00-000	220	450	129	150	80	35	220	100	130	4 x Ø 13	9
LT 300	01-42-00-000	300	550	165	190	125	40	300	100	135	4 x Ø 13	15
LT 420	01-43-00-000	420	680	200	240	165	60	420	130	178	4 x Ø 17	20
LT 421	01-44-00-000	420	770	200	240	165	60	420	170	215	4 x Ø 17	20
LT 530	01-59-00-000	530	900	260	310	85	70	420	200	250	4 x Ø 18	23
LT 280	01-11-00-000	280	450	146	180	160	40	240	100	135	4 x Ø 16	15
LT 380	01-13-00-000	380	650	179	220	155	60	240	130	178	4 x Ø 18	20
LT 500	01-15-00-000	500	800	192	250	170	70	370	170	215	4 x Ø 17	20
LT 501	01-17-00-000	500	800	227	320	170	70	370	170	215	4 x Ø 17	20

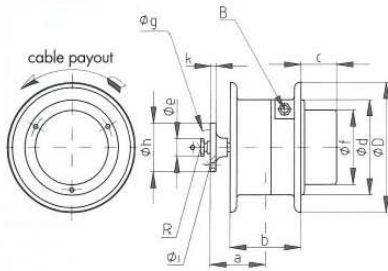

cable size	cable type	cable dia	cable weight	payout Horiz	payout Vertical	Drum ref	Slip ring size
4 x 10mm <sup>2</sup>	Semoflex Drum	18.8 mm	0.61 kg/m	7.0 m	7.0m	LT 220/151-4-60	60 Amps
	Trommelflex PUR-HF			13.0 m	13.0m	LT 220/251-4-60	60 Amps
				20.0 m	9.0m	LT 221/251H-4-60	60 Amps
				29.0 m	15.0m	LT 300/272H-4-60	60 Amps
				40.0 m	24.0m	LT 420/253-4-60	60 Amps

cable size	cable type	cable dia	cable weight	payout Horiz	payout Vertical	Drum ref	Slip ring size
4 x 16mm <sup>2</sup>	Semoflex Drum	23.4 mm	0.92 kg/m	14.0 m	6.0m	LT 300/152-4-125	125 Amps
	Trommelflex PUR-HF			20.0 m	12.0m	LT 300/252-4-125	125 Amps
				18.0 m	18.0m	LT 300/272-4-125	125 Amps
				25.0 m	14.0m	LT 420/283-4-150	150 Amps