

Single weave, single eye Cable Anchor Stockings from High Tensile Galvanised Steel Wire.




For heavy duty applications we can also offer Double & Triple weave and Double eye, please ask our sales office for details.



Single offset

Type.	Range	Dim'n 'L'	Dim'n 'E'	Min. breaking strain
LS3/06	6 - 10 mm	120 mm	100 mm	200 kg
LS3/10	10 - 13 mm	180 mm	100 mm	346 kg
LS3/13	13 - 16 mm	250 mm	100 mm	346 kg
LS3/16	16 - 20 mm	250 mm	100 mm	681 kg
LS3/20	20 - 25 mm	330 mm	100 mm	814 kg
LS3/25	25 - 32 mm	360 mm	125 mm	814 kg
LS3/32	32 - 38 mm	380 mm	125 mm	1128 kg
LS3/38	38 - 44 mm	430 mm	125 mm	1128 kg
LS3/44	44 - 52 mm	480 mm	150 mm	1128 kg
LS3/50	50 - 65 mm	530 mm	150 mm	2464 kg
LS3/64	64 - 77 mm	580 mm	150 mm	2464 kg
LS3/76	76 - 89 mm	630 mm	200 mm	5241 kg
LS3/89	89 - 102 mm	680 mm	200 mm	5241 kg

Plugs & Sockets

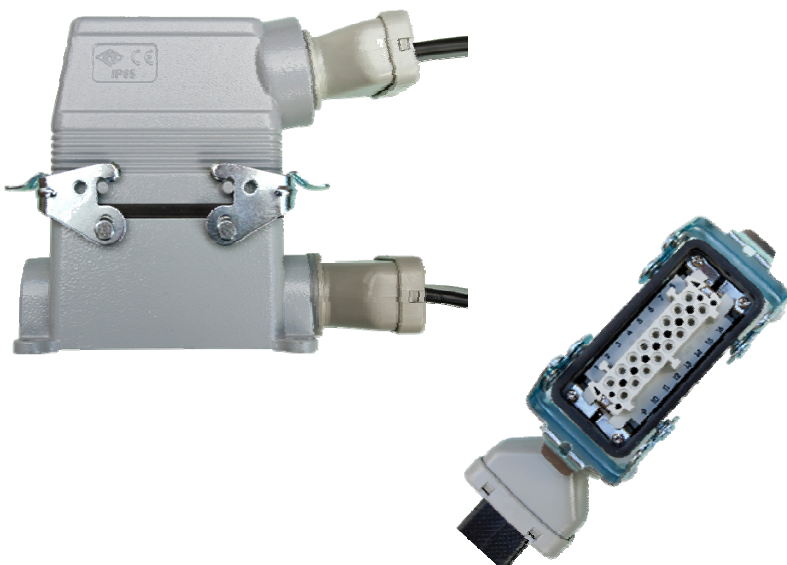

SIMBAL Plugs & Sockets feature interchangeable inserts and hoods / enclosures combining to provide a large range. The following sizes are available ex-stock with either Male or Female inserts :-

- 4 Pin 80 Amp
- 6 Pin 35 Amp
- 10 Pin 16 Amp
- 16 Pin 16 Amp
- 24 Pin 16 Amp