


**H&K Heavy Duty Spring Operated Cable Reeling Drums for
5c x 1.5mm², 5c x 2.5mm², 7c x 1.5mm² & 7c x 2.5mm²
PUR Drum Reeling cables**

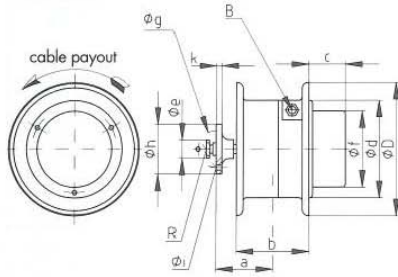

Type	Drawing No.	Ø d	Ø D	a	b	3+PE c ^{II}	Ø e	Ø f	Ø g	Ø h	Ø i	k
LT 155	01-61-00-000	155	260	101,5	110	80	35	155	65	85	4 x Ø 9	10
LT 180	01-53-00-000	180	290	113	130	110	35	180	65	85	4 x Ø 9	10
LT 220	01-38-00-000	220	400	114	120	80	35	220	100	130	4 x Ø 13	9
LT 221	01-52-00-000	220	450	129	150	80	35	220	100	130	4 x Ø 13	9
LT 300	01-42-00-000	300	550	165	190	125	40	300	100	135	4 x Ø 13	15
LT 420	01-43-00-000	420	680	200	240	165	60	420	130	178	4 x Ø 17	20
LT 421	01-44-00-000	420	770	200	240	165	60	420	170	215	4 x Ø 17	20
LT 530	01-59-00-000	530	900	260	310	85	70	420	200	250	4 x Ø 18	23
LT 280	01-11-00-000	280	450	146	180	160	40	240	100	135	4 x Ø 16	15
LT 380	01-13-00-000	380	650	179	220	155	60	240	130	178	4 x Ø 18	20
LT 500	01-15-00-000	500	800	192	250	170	70	370	170	215	4 x Ø 17	20
LT 501	01-17-00-000	500	800	227	320	170	70	370	170	215	4 x Ø 17	20

cable size	cable type	cable dia	cable weight	payout Horiz	payout Vertical	Drum ref	Slip ring size
5 x 1.5mm ²	Semoflex Drum	11.8 mm	0.18 kg/m	7.0 m	7.0m	LT 155/108-5-26	26 Amps
	Trommelflex PUR-HF			12.0 m	12.0m	LT 180/131-5-26	26 Amps
				20.0 m	18.0m	LT 180/231H-5-26	26 Amps
				26.0 m	25.0m	LT 220/251H-5-26	26 Amps
				47.0 m	31.0m	LT 300/252H-5-26	26 Amps

cable size	cable type	cable dia	cable weight	payout Horiz	payout Vertical	Drum ref	Slip ring size
5 x 2.5mm ²	Semoflex Drum	12.8 mm	0.24 kg/m	7.0 m	7.0m	LT 155/108-5-26	26 Amps
	Trommelflex PUR-HF			11.0 m	11.0m	LT 180/131-5-26	26 Amps
				18.0 m	14.0m	LT 180/231H-5-26	26 Amps
				26.0 m	23.0m	LT 220/251H-5-26	26 Amps
				46.0 m	23.0m	LT 300/252H-5-26	26 Amps

cable size	cable type	cable dia	cable weight	payout Horiz	payout Vertical	Drum ref	Slip ring size
7 x 1.5mm ²	Semoflex Drum	13.3 mm	0.23 kg/m	7.0 m	7.0m	LT 155/108-7-26	26 Amps
	Trommelflex PUR-HF			10.0 m	10.0m	LT 180/131-7-26	26 Amps
				12.0 m	12.0m	LT 220/151-7-26	26 Amps
				20.0 m	20.0m	LT 220/251H-7-26	26 Amps
				26.0 m	24.0m	LT 221/251H-7-26	26 Amps
				35.0m	34.0m	LT 300/272H-7-26	26 Amps
49.0m	24.0m	LT 300/252H-7-26	26 Amps				

cable size	cable type	cable dia	cable weight	payout Horiz	payout Vertical	Drum ref	Slip ring size
7 x 2.5mm ²	Semoflex Drum	14.0 mm	0.25 kg/m	10.0 m	10.0m	LT 180/131-7-26	26 Amps
	Trommelflex PUR-HF			12.0 m	12.0m	LT 220/151-7-26	26 Amps
				17.0 m	17.0m	LT 220/251H-7-26	26 Amps
				26.0 m	18.0m	LT 221/251H-7-26	26 Amps
				47.0 m	18.0m	LT 300/252H-7-26	26 Amps
				36.0 m	30.0m	LT 300/272H-7-26	26 Amps